

PLASKOLITE

TUFFAK® Marine
Enclosure guide



The undeniable look of TUFFAK...

Plaskolite, where innovation is natural

MAKE A STUNNING STATEMENT

With a selection of products providing a glass-like, wrinkle-free appearance, TUFFAK marine products make navigating a breeze. Combining clarity with durability, TUFFAK polycarbonate sheet provides clear, unobstructed views. These low distortion, high impact resistant products are available in 1-2 mm, all of which can be sewn to provide a clean, crisp appearance to any enclosure. TUFFAK is ideal for any climate as it remains stable and retains its shape during temperature fluctuations. The products withstand the harshest environment, providing unparalleled sightlines and a stunning look for years.

EXPLORE THE OPTIONS



TUFFAK Marine 5

- » Designed for the most demanding applications
- » Provides highest weathering performance
- » High optics, long-term clarity and low optical distortion
- » wo-sided hard coat protection against abrasion, UV and chemical attack
- » Sewable
- » Available in 1.5 mm and 2 mm
- » Flat and curved applications*



TUFFAK AR

- » Provides high optics, long-term clarity and low optical distortion
- » Two-sided hard coat protection against abrasion, UV and chemical attack
- » ewable
- » Available in 1.5 mm
- » Recommended for flat applications only



TUFFAK VR

- » High optical clarity alternative to vinyl
- » Two-sided enhanced weatherability, resistance to yellowing
- » Improved sew-ability & cut-ability over heavier gauge polycarbonate options
- » Can be rolled, ideal where space is limited
- » Available in 1 mm
- » Flat and curved applications*

WARRANTY

TUFFAK Marine 5 - Five (5) year limited warranty: Breakage, Yellowing, Microcracking

TUFFAK VR - Five (5) year limited warranty: Breakage

Product selector

Product	Gauge	Standard sheet size	Bend radius (min.)
TUFFAK Marine 5	1.5 mm	1270 mm x 2800 mm	500 mm
TUFFAK Marine 5	2 mm	1500 mm x 2800 mm	760 mm
TUFFAK AR	1.5 mm	1220 mm x 2440 mm	No bend
TUFFAK VR	1 mm	1320 mm x 2800 mm	100 mm



Product Features

Product Features	Material				
	TUFFAK Marine 5	TUFFAK AR	TUFFAK VR	Vinyl	Acrylic
Optically clear	✓	✓	✓	-	✓
Low distortion	✓	✓	✓	-	✓
Abrasion resistance	✓	✓		Available	Available
Wrinkle-free	✓	✓	✓	-	-
Sewable	✓	✓	✓	✓	-
Rollable	-	-	✓	✓	-
Low shrink rate	✓	✓	✓	-	
5 year warranty*	✓	-	✓	-	Contact manufacturer

*Visit mfg. website for warranty details

TUFFAK VR	TUFFAK AR	TUFFAK Marine 5
Good	Better	Best

Fabrication

Shipping / Handling*

Abrasion resistant TUFFAK Marine 5 and TUFFAK AR sheets should be shipped to the fabricator on a flat shipping pallet and should not be rolled or bent. TUFFAK VR can be shipped in either a shipping tube or by flat pallet.

The protective film masking should remain on the sheet during fabrication. Cut away only enough masking for seam work. Peel the masking back and then trim it off - do not score the sheet and peel the masking. This helps reduce the risk of scratching from the cutting and sewing process. Remove the remainder of masking after enclosure is installed on the boat.

Cutting

TUFFAK sheets can be cut with electric metal shears, tin snips or cutlery grade, carbon steel scissors (e.g. Kai scissor #7280 or Fiskars® 8" Titanium Nitrate Shop Snip for a tight radius). Wiss® Multi-Purpose Snip model A10BS, has an offset for table work. Edge finishing: Remove burred edges caused by cutter using a deburring tool, a very fine metal file or lightly sand to deburr edges of the sheet along cut lines prior to sewing. Corners: Remove sharp corners to keep polycarbonate from wearing through the canvas fabric over time.




Sewing

Commercially available, heavy duty sewing machines capable of sewing through polycarbonate are recommended. See machine supplier for brand and model.

General sewing recommendations:

- » **Sewing machine speed:** Use a slow feed rate. Top feed preferred – bottom feed will build up polycarbonate plugs/chips dislodged by the needle.
- » **Stitch rate:** Average (4) stitches per inch. A faster feed will add excess heat to the sewing needle.
- » **Stitch:** Square Feet or Step Stitch are commonly used. Distance from edge of sheet should be > 13mm.
- » **Seams:** The most popular seams used in canvas tops and covers are: the overlapping seam, the semi-flat felled seam, and the full flat felled seam. Seams can be waterproofed by using acrylic or Mylar® film basting tape. This double-sided adhesive tape bonds well with coarse canvas fabric. Use a soapstone pencil to mark stitching lines. Lines wash away when exposed to water.
- » **Motor:** A servo motor instead of a DC stepper/clutch motor will allow for a more controlled sewing feed rate.
- » **Needles:** Groz Beckert needle points – Tripoint size 22, 23 or Groz Beckert San 5.2 double grooved. Although diamond tip needles are capable of sewing through polycarbonate (size 20, 21, 22), they may abrade the weave of the fabric more than tripoints. A more roundly pointed needle will move between fabric fibers versus physically cutting the weave, which may eventually cause the fabric to fray.
- » **Needle Cooling:** Using a mini-cooler to blow cold air over the needle will keep it from overheating during long runs.
- » **Thread:** Standard choices include Solarfix® and Tenara® PTFE thread.* PTFE thread is commonly used due to the heat buildup in the needle from the sewing process.

* Fabricator is responsible for evaluating thread brand.

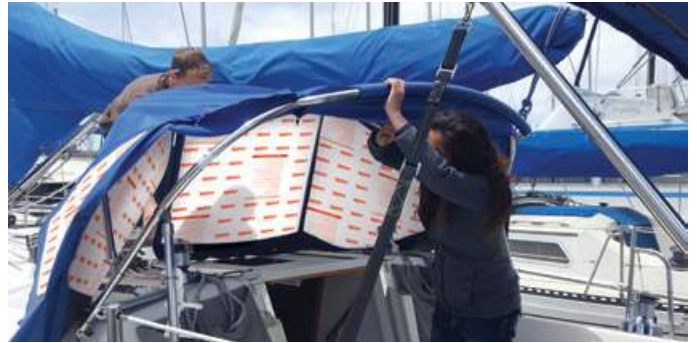

Troubleshooting

Thread breakage:

Check for rough metal surfaces within sewing area: needle, needle plate, feed dog, sewing hook or foot. Deburr metal surfaces where needed. Sand down burrs with emery string cord.

- » Slow down stitching speed
- » Replace worn needle
- » Use mini-cooler to cool needle which keeps thread from melting and breaking at the needle due to heat buildup
- » Thread can split at needle eyehole. Clean debris from eyehole
- » Switch to larger needle

Excess heat buildup within sewing needle:

- » Slow feed rate
- » Use mini-cooler to cool needle

Thread ravel issues:

- » Reduce bobbin tension on thread

Additional information on sewing products:

Sloan Machinery Company
www.sloanmachinery.com
Salem, NH 03079
Contact: Sam Sloan
603-893-8883

Consew (Consolidated Sewing Machine Corp.)
www.consew.com
400 Veterans Blvd.
Carlstadt, NJ 07072
800-221-8494
212-741-7788



Cleaning

TUFFAK, like other polycarbonate products, requires careful cleaning to prevent crazing, cracking or yellowing of product. Clean water should be used to wash off grime and loose grit from all panels before cleaning products are applied. Only a soft microfiber cloth, or microfiber sponge should be used to clean TUFFAK windows. Avoid squeegees, deck / scrub brushes, scotch pads, paper / shop towels as they can be abrasive and can cause haze or swirls in the sheet. Avoid grit polishes as abrasives can lead to haze and swirls.

Points to remember:

Do not use abrasive cleaners

Do not use high alkaline cleaners (high pH or ammoniated)

Do not leave cleaners sitting on polycarbonate for periods of time; wash off immediately

Do not apply cleaners under direct sunlight or at elevated temperatures

Do not clean polycarbonate with any unapproved cleaners. When in doubt seek guidance.

Using scrapers, squeegees, razors or other sharp instruments may permanently scratch polycarbonate.

Always avoid dry rubbing cleaning polycarbonate, as sand and dust particles clinging to the exterior of the glazing may scratch its surface.

An anti-static canned-air ionizer can reduce electrostatic charge buildup on polycarbonate, consequently reducing dirt and dust buildup that would hinder cleaning.

Cleaners:

Use only neutral-pH cleaners or those specified to be compatible with TUFFAK products. Harsh detergents may damage product. TUFFAK marine windows can be cleaned with over-the-counter dishwashing liquids such as Joy® or Palmolive® soaps. Rinse thoroughly with clean water to remove all traces of cleaning products. To prevent water spots, thoroughly dry the product with a dry microfiber cloth or chamois. Do not apply RainX® or other brands of hydrophobic surface treatments to TUFFAK polycarbonate as they may damage window's protective surface.

Waxes and sealants: can be helpful to reduce accumulation of dust / dirt / salt spray and make cleaning easier. Approved products include Meguiar's #10 Clear Plastic Polish & Cleaner, Meguiar's M18 Mirror Glaze® Clear Plastic Detailer, Star Brite® Rain View Wet Weather Visibility Treatment, Golden Eagle Company 303® Clear Vinyl Protective Cleaner, Sumner Laboratories 210® Plastic Cleaner & Polish.

Removal and stowing:

Extra handling care should be taken any time when windows are installed or removed. Prior to removal, TUFFAK windows should be cleaned and dried thoroughly. Always protect your windows with cloth covers immediately upon removal. Store windows in a location which is not exposed to the elements. If possible lay windows in a flat position. If storing horizontally isn't possible, store in a vertical position where they will not be bumped or damaged. Keep a cloth sheet between windows during storage. We recommend placing a soft non-abrasive fabric such as Evolution® to cover over all exposed window surfaces when not in use. Covering the surface reduces heat buildup and exposure to harmful UV radiation.

All materials should be tested prior to use for compatibility.

Please contact your Plaskolite representative or the Technical Service Group at 800.628.5084 with any questions, or if you require additional information.

Photos courtesy of:

Cover: The Canvas Guy & Mark Mitchell (Boat Owner)

Page 2 left side, top; left side bottom; right side, bottom: David's Custom Trimmers

Page 2 left side, middle: Alameda Canvas & Coverings

Page 2 right side, top: The Canvas Guy & Mark Mitchell (Boat Owner)

Page 3 left: Alameda Canvas & Coverings

Page 3 right: Marine Tops Unlimited, Inc.

Page 4 top three right: Marine Tops Unlimited, Inc.

Page 5: Alameda Canvas & Coverings

Fiskars® is a registered trademark of Fiskars Corporation

Wiss® is a registered trademark of Apex Tool Group

Mylar® is a registered trademark of E.I. DuPont Corporation

Solarfix® is a registered trademark of AY Tech LLC

Tenara® is a registered trademark of W.L. Gore & Associates, Inc.

Joy® is a registered trademark of Proctor and Gamble

Palmolive® is a registered trademark of Colgate Palmolive

Rain-X® is a registered trademark of ITW Global Brands

Evolution™ is a trademark of Kimberly Clark

M18 Mirror Glaze® is a registered trademark of Meguiar's Inc.

303® is a registered trademark of Gold Eagle Company

210® is a registered trademark of Sumner Laboratories

PLASKOLITE

A GLOBAL LEADER IN THE PRODUCTION OF THERMOPLASTIC SHEET

FOUNDED IN 1950

Our Mission: to deliver superior thermoplastic sheet, coatings and polymers to the world, through long-lasting customer relationships and hands-on customer service.

MANUFACTURING LOCATIONS



From our founding, PLASKOLITE strives to treat our employees, our customers, our community and the world, with kindness, dignity and respect. This drives our continuing effort to create sustainable products, in a sustainable manner, for future generations. This on-going commitment is expressed in the

PLASKOLITE Sustainable Ecosystem:

QUICK FACTS

STATUS: Privately held


GLOBAL HEADQUARTERS: Columbus, OH

EMPLOYEES: 1900 Worldwide

MARKETS SERVED: Signage, Lighting, Retail Display, Construction, Transportation, Security, Bath & Spa, Industrial, Architecture, Green Houses

OUR PILLARS OF SUSTAINABILITY

EACH CONTRIBUTES TO MAKING THE WORLD A BETTER PLACE

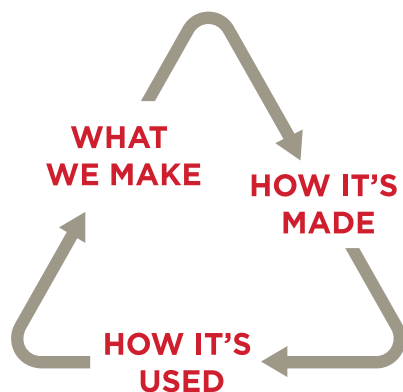

WHAT WE MAKE

Versatile, high-quality, durable thermoplastic materials...not single-use plastics

HOW IT'S MADE

How we make our products reflects our overall philosophy of continuous environmental improvement

HOW IT'S USED

Our thermoplastics play an important role in advancing human well-being, energy conservation and quality of life

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2023 PLASKOLITE, LLC 082023
TUFFAK® is a registered trademark of PLASKOLITE LLC

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com

BRO046