


Polygal Standard 8 mm Polycarbonate Multi Wall Sheets

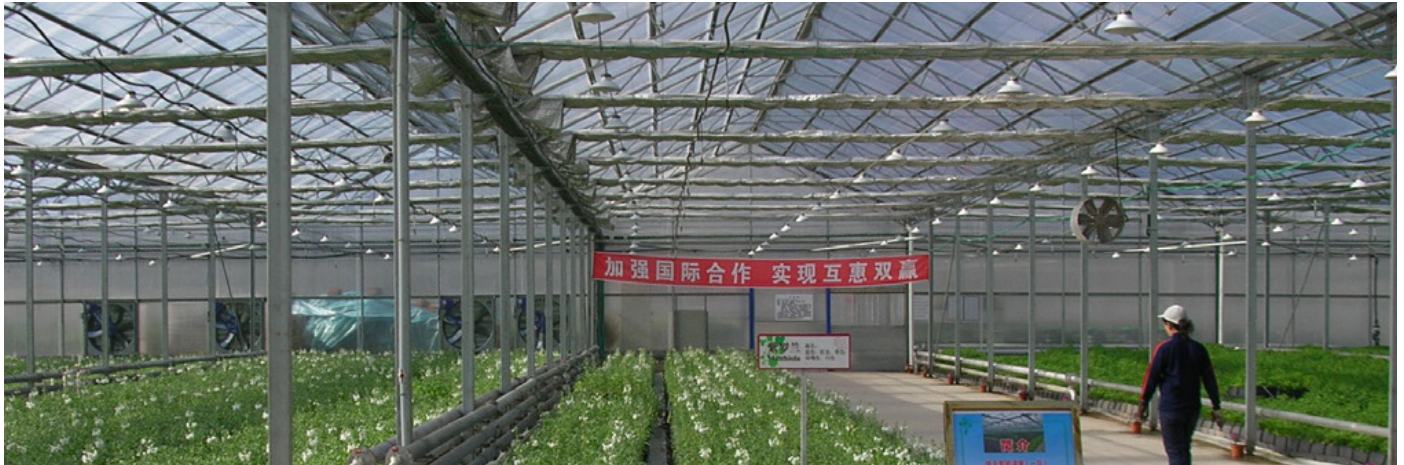

Combines endless design possibilities with many important advantages:

- Excellent thermal insulation
- Controlled daylight transmission
- Virtually unbreakable
- Flexible and easy to install
- Lightweight
- UV blocking layer
- Energy saving
- Environmentally friendly



Rigid sheet structure provides extra strength under wind and snow loads.

Standard Sheets feature a UV protective layer to protect against yellowing, and are covered by a 10 Year Warranty against breakage and yellowing.

10 - Year Guaranteed Anti-Fog Performance

Polygal's advanced Anti-Fog coating provides the most effective, long-term protection against condensation drip damage.

- Less drop formation allows better light transmission
- Reduces disease and other damage from dripping
- Anti-Fog coating covered by a 10 Year Warranty

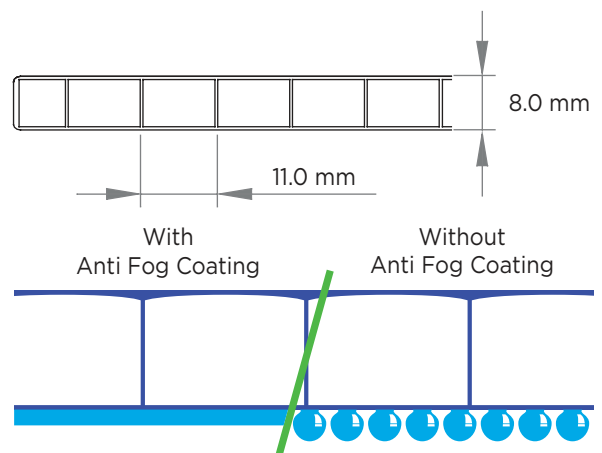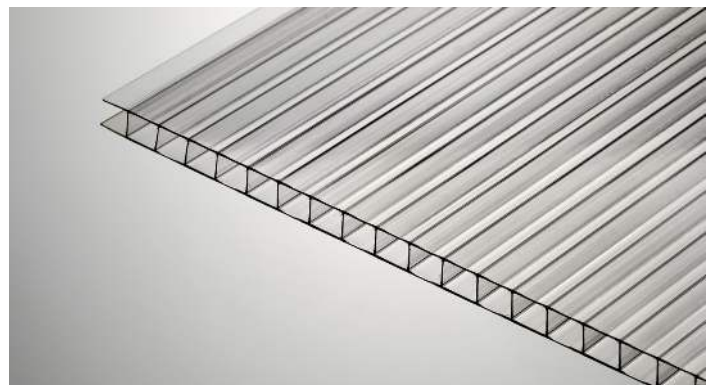

Technical Specifications

Thickness (mm)	Weight (g/m ²)	Standard width (mm)	Standard length (mm)	Minimum radius for cold bending (m)	U-Factor (by ASTM C177)	Light Transmission By ASTM D 1003 (%)
8	1500	2100	12000	1.4	3.3	80

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com