





PCSS 6 MM STANDARD

PCSS 6 mm Standard PLASKOLITE Multiwall Polycarbonate Sheets

Specially manufactured with a clear tint appearance, provides excellent thermal insulation, highly flexible, yet virtually unbreakable, Anti-Fog coating that prevents condensation build up, and falling droplets, rigid sheet structure provides extra strength under wind and snow loads.

- » Excellent Insulation
- » Controlled Daylight Transmission
- » Virtually Unbreakable
- » Flame Retardant
- » Flexible and Easy to Install
- » Lightweight
- » UV Blocking Layer
- » Environmentally Friendly

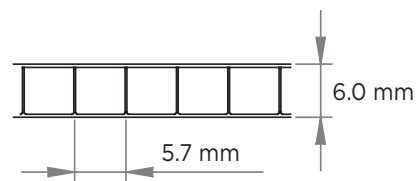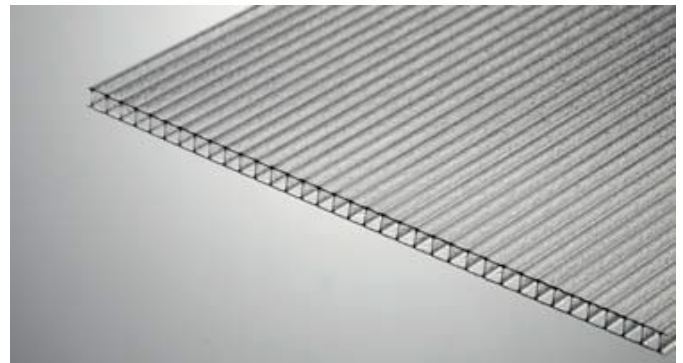

Technical Specifications

THICKNESS (mm)	WEIGHT (g/m ²)	STANDARD WIDTH (mm)	STANDARD LENGTH (mm)	MIN. RADIUS FOR COLD BENDING (mm)	U-FACTOR (BY ASTM C177)	LIGHT TRANSMISSION (%) (BY ASTM D1003)
6	1300	2100	6000 12000	1050	3.6	80 (clear)

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2024 PLASKOLITE, LLC 072624
OPTIX® is a registered trademark of PLASKOLITE LLC

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com

SLS100_VER_ABX