

PCSS 8 mm Standard PLASKOLITE Multiwall Polycarbonate Sheets




Combines endless design possibilities with many important advantages:

- Excellent thermal insulation
- Highly flexible, yet virtually unbreakable
- Lightweight and easy to install
- Rigid sheet structure provides extra strength under wind and snow loads.

Standard Sheets feature a UV protective layer to protect against yellowing, and are covered by a 10 Year Warranty against breakage and yellowing.

Recommended Uses: covering of medium span structures where excellent thermal insulation is required.

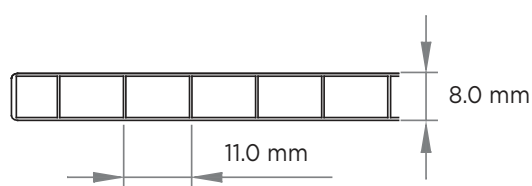

Technical Specifications

Thickness (mm)	Weight (g/m ²)	Standard width (mm)	Standard length (mm)	Min. radius for cold bending (mm)	U-Factor (by ASTM C177)	Light Transmission (%) (by ASTM D1003)
8	1500	2100	6000 12000	1400	3.3	80 (clear) 32 (ice)

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com